


# RUP 502-U

## Lifting and lowering evacuation device

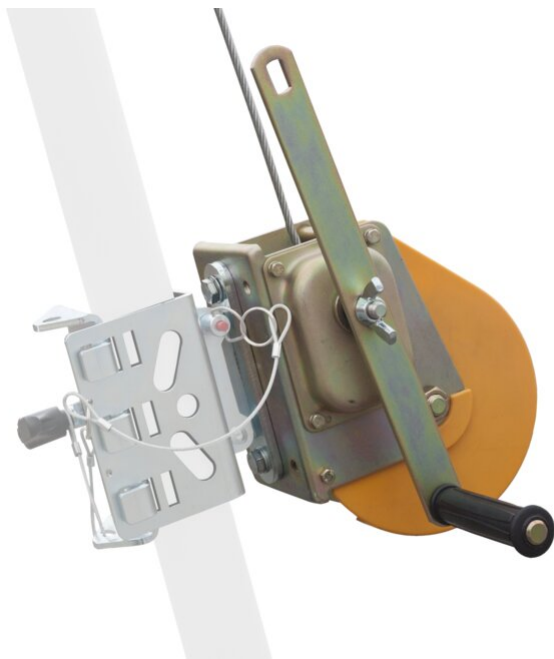

The RUP502-U lifting and lowering evacuation device is a rescue equipment component. Using the device, an injured person can be raised from a lower level to a higher level or lowered from a higher level to a lower level. The descent distance must not exceed 2 meters.

Winch equipped with automatic friction brake.

### SPECIAL FEATURES



### PARAMETERS

WLL working load limit	140 kg
<strong>MBS</strong> minimum breaking strength	20 kN
Safety Factor	10:1

#### KIT INCLUDES

Spring absorber	SDW
-----------------	-----

Długość korby - Wariant 1	150 mm
Długość korby - Wariant 2	300 mm

Siła wymagana do wyciągnięcia ładunku w wariantcie 1	5,6 kg
--	--------

Siła wymagana do wyciągnięcia ładunku w wariantcie 2	11,6 kg
--	---------

Przełożenie mechanizmu przekładni	5:1
-----------------------------------	-----

#### CONSTRUCTION

Material	steel
----------	-------

Finishing	galvanization
-----------	---------------

#### MECHANISM

Material	steel
Finishing	galvanization

#### POKRYWA

Material	plastic
Color	orange

#### ROPE

Material	steel
Finishing	galvanization
Rope diameters $\varnothing$	6,3 mm