
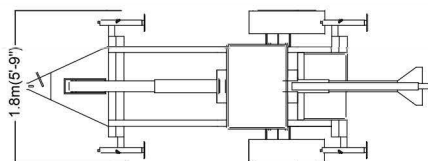
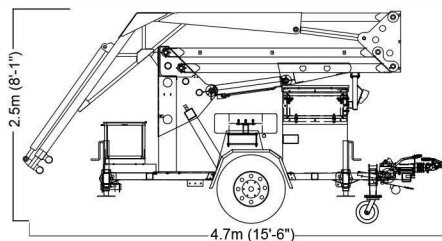


X1250 SPEC SHEET

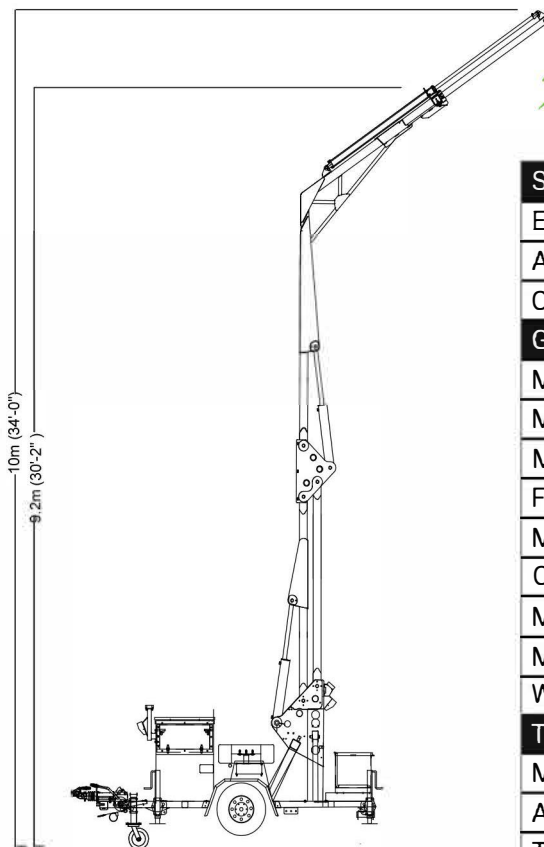

Safety Standards	
EN 795-2012 Class B	
Applicable Fall Arrest Standards set forth in ANSI Z359.6	
OSHA Fall Arrest Standards	
General	
Max. Working Height	10m (34') with Mast Fully Extended
Min. Working Height	0.6m (2')
Max. Folded Height	2.6m (8'-1")
Frame Width	1.7m (5'-9")
Max. Arm Reach Out	3m (9'-9.5")
Overall Length	4.7m (15'-6")
Max. Anchor Point capacity	141kg (310 lbs)
Max. Allowable Users	3
Weight	2676 kg (5,900 lbs)
Towing	
Max. Towing Speed	Posted Highway Speed
Axle	3175kg Torsion Axle w/ Cable Brakes
Tires	225/75/R16 Radials
Receiver	450mm (approx)
Trailer Plug Wiring	7-Pole Blade Style lead
Operation	
Actuating Method	Electric-driven Hydraulic system
Controls	Remote (15 ft. cord length)
Power Source	12 volt Battery (210 Amp hour rating) w/30A Fuse & Battery Guage
Charging System	220/110 Volt quick Smart Charger
Outrigger System	Four (4) Manually Adjustable Jacks
Hydraulics	
Fluid Type	Mobil DT10 Excel 22
Fluid Capacity	47.3L (12.5 Gallons)

*SRLs not included.

www.highworx.ie

www.highworx.ie

+353 (0) 1 5563424

sales@highworx.ie

Company Registration Number: 469261